
17. BULBS REMOVAL/INSTRUMENT/HORN Mongoose/KXR 90/50

BULBS REMOVAL/INSTRUMENT/HORN

BULBS REMOVAL -----	17- 1
INSTRUMENT (ON ROAD ONLY) -----	17- 4
HORN (ON ROAD ONLY)-----	17- 4

17. BULBS REMOVAL/INSTRUMENT/HORN Mongoose/KXR 90/50

BULBS REMOVAL


HEADLIGHT (ON ROAD ONLY)

Remove the front fender. (See page 2-5)

Disconnect the headlight wire coupler.

Remove the rubber boot from the bulb socket.


Relax the lock clip to remove the bulb and replace with a new one.

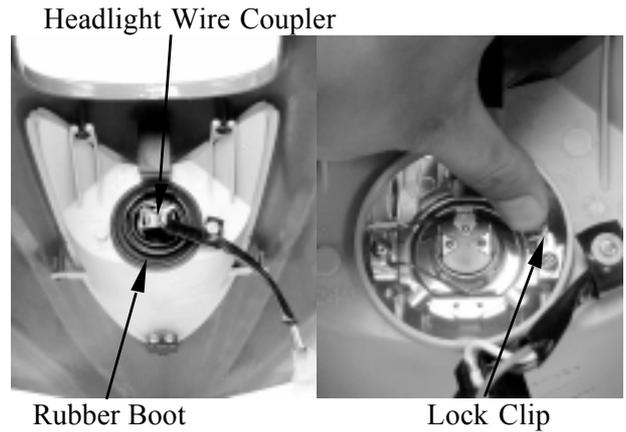

Install the bulb, aligning the bulb socket groove with the bulb tab and set the lock clip.

Install the rubber boot.

Install the front fender in the reverse order of removal.

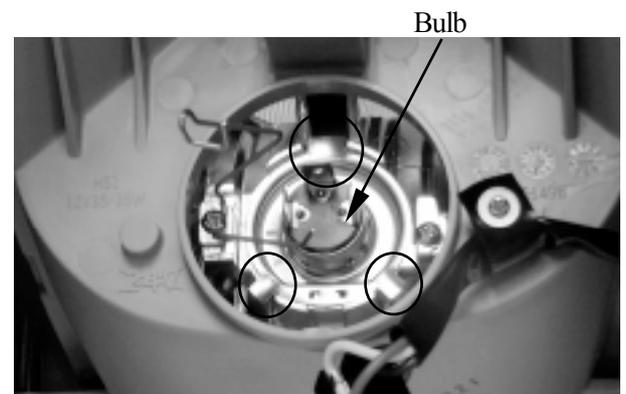


TAIL/BRAKE LIGHT

Remove the two screws and then remove lens.

Remove the bulb by turning it counterclockwise and replace the bulb with a new one.

Installation is in the reverse order of removal.

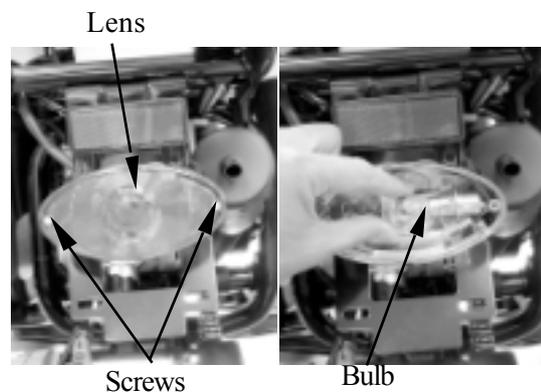

17. BULBS REMOVAL/INSTRUMENT/HORN Mongoose/KXR 90/50


INDICATOR LIGHTS

Remove the handlebar cover (see page 2-3) and raise it.

Remove the bulb sockets by pulling them out.

Pull the bulb out of the socket and replace it with a new one.

Installation is in the reverse order of removal.

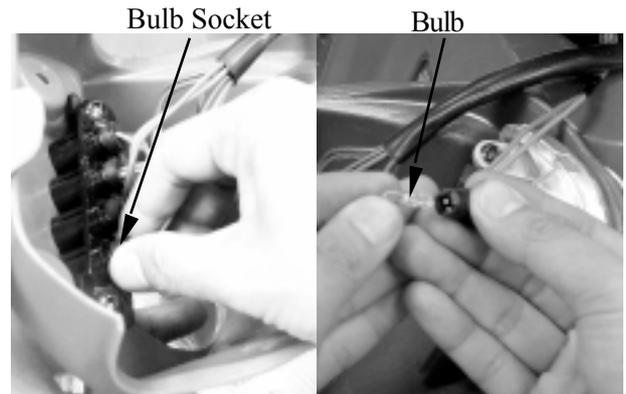


POSITION LIGHT (ON ROAD ONLY)

Pull the bulb socket out of the position light case.

Pull the bulb out of the socket and replace it with a new one.


Installation is in the reverse order of removal.

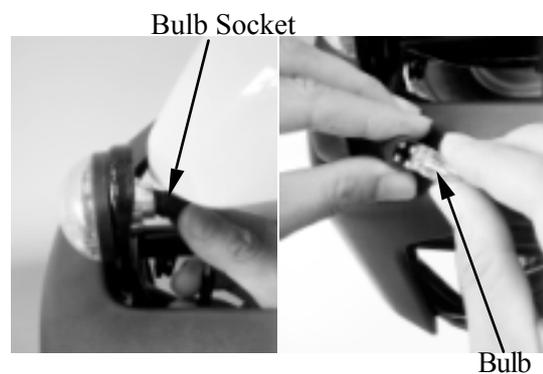


FRONT TURN SIGNAL LIGHT (ON ROAD ONLY)

Remove the turn signal light lens by a flat screwdriver.

Pull the bulb socket out from the signal light case and remove bulb.

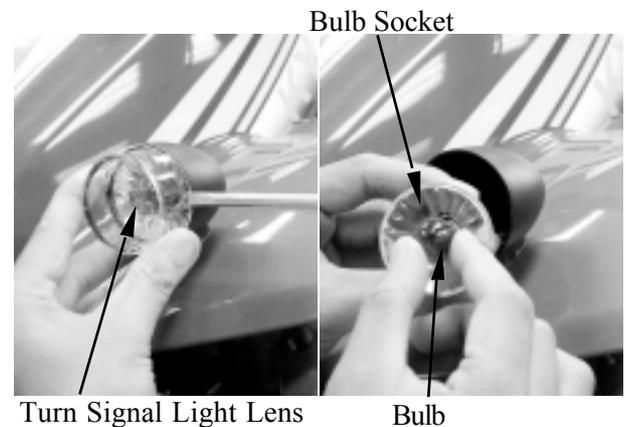

Install the bulb, aligning the bulb socket groove with the bulb tab.

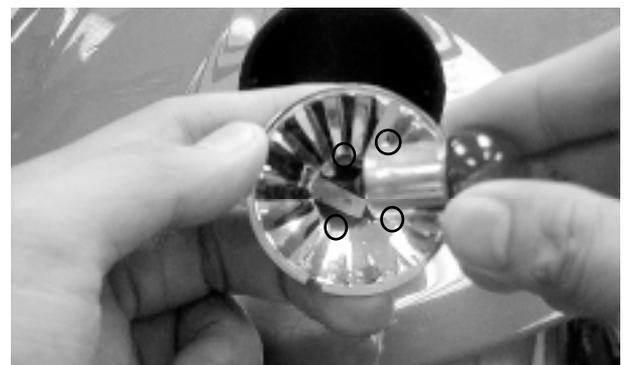


17. BULBS REMOVAL/INSTRUMENT/HORN Mongoose/KXR 90/50

Install the bulb socket, aligning the bulb socket groove with the turn signal case tab.
Install the turn signal lens, aligning the turn signal lens groove with the turn signal case tab.



REAR TURN SIGNAL LIGHT (ON ROAD ONLY)

Remove the screw and remove the turn signal light lens.
Pull the bulb socket outside from the signal light case and remove bulb.

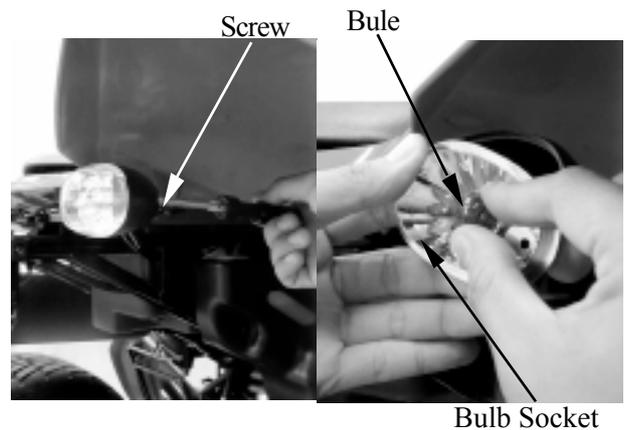

Install the bulb, aligning the bulb socket groove with the bulb tab.

Install the bulb in the reverse order of removal.




17. BULBS REMOVAL/INSTRUMENT/HORN Mongoose/KXR 90/50

INSTRUMENT (ON ROAD) REMOVAL

Remove the handlebar cover. (See page 2-3)
Disconnect the meter connectors.
Remove the two screws and then remove the instrument.

Installation is in the reverse order of removal.

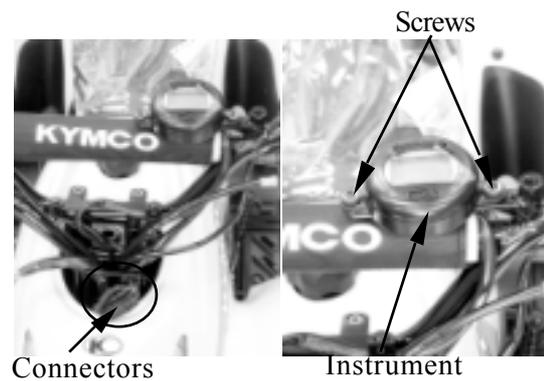

HORN (ON ROAD)

REMOVAL
Disconnect the horn wire connectors.
Remove the bolt and remove horn.

Installation is in the reverse order of removal.

