


10. A.C. GENERATOR/STARTER CLUTCH

A.C. GENERATOR/STARTER CLUTCH

SCHEMATIC DRAWING -----	10-1
SERVICE INFORMATION -----	10-2
TROUBLESHOOTING -----	10-2
RIGHT CRANKCASE COVER REMOVAL-----	10-3
STATOR REMOVAL -----	10-3
FLYWHEEL REMOVAL-----	10-3
STARTER CLUTCH -----	10-4
FLYWHEEL INSTALLATION-----	10-5
STATOR INSTALLATION -----	10-6
RIGHT CRANKCASE COVER INSTALLATION-----	10-6

10. A.C. GENERATOR/STARTER CLUTCH

SCHEMATIC DRAWING

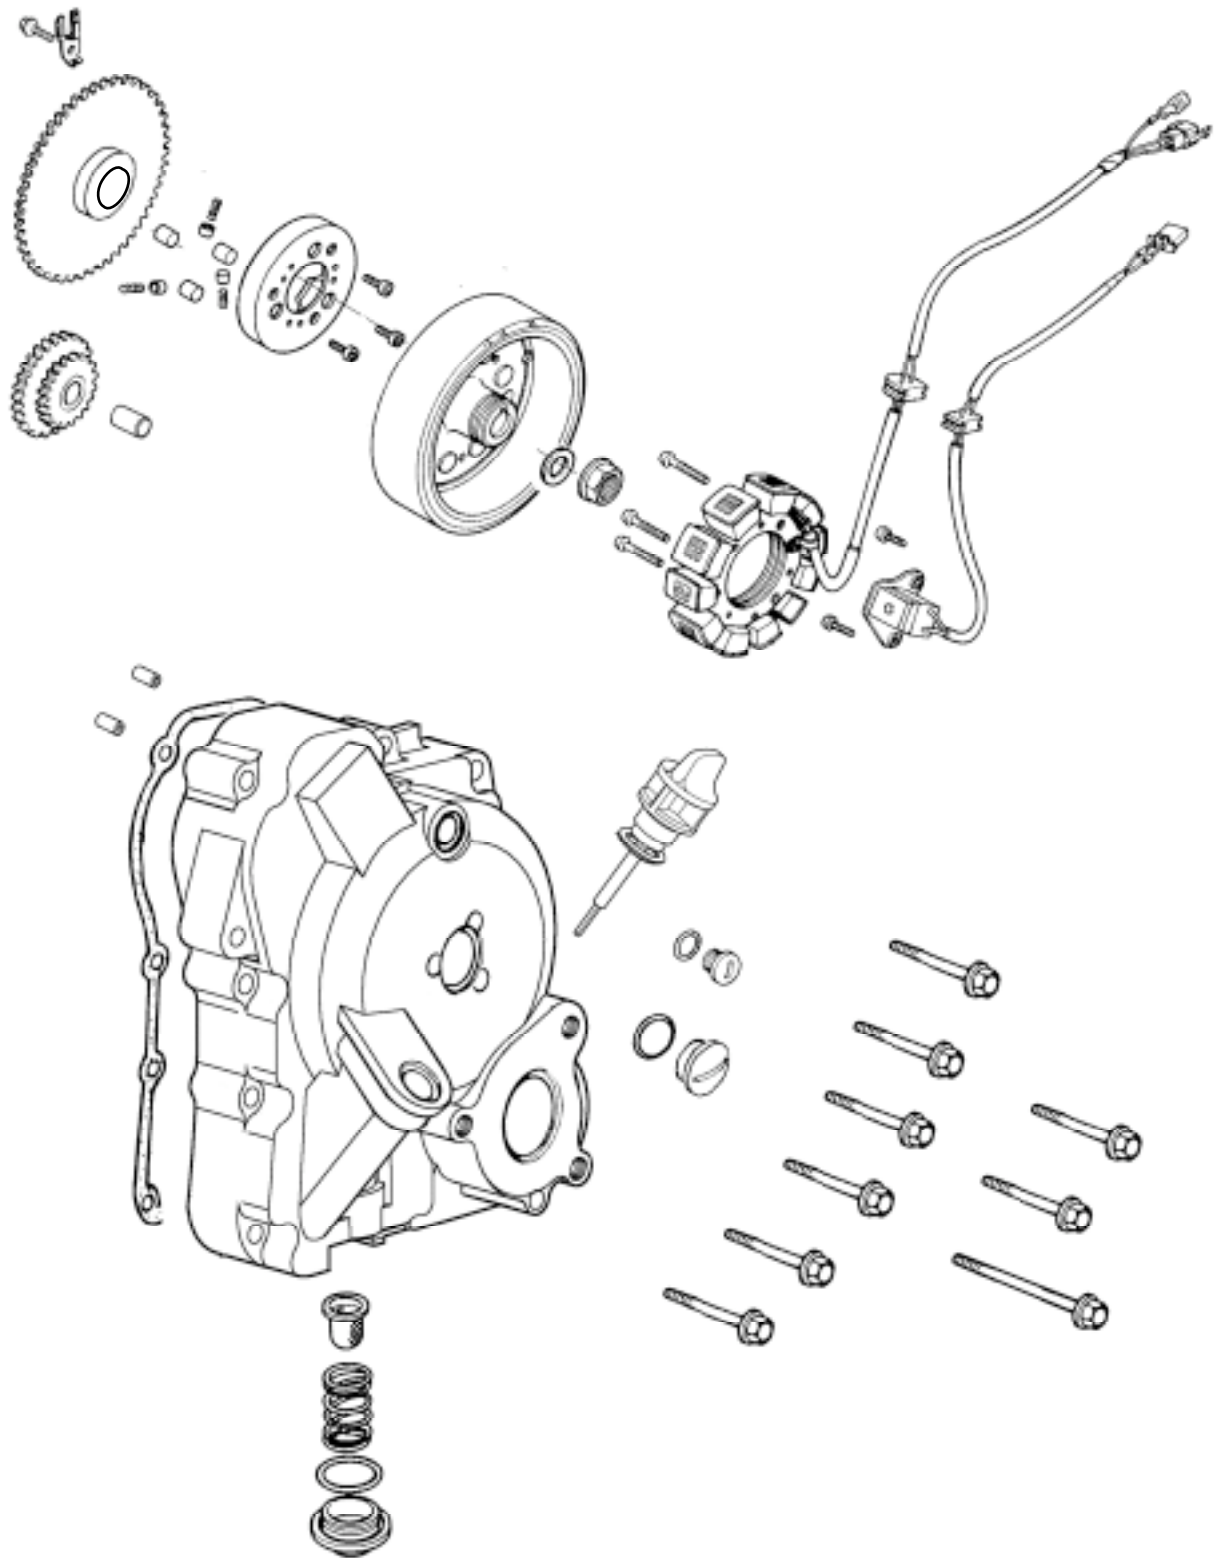

10. A.C. GENERATOR/STARTER CLUTCH

SERVICE INFORMATION

GENERAL INSTRUCTIONS

- All servicing operations and inspections in this section can be made with the engine installed.
- Drain the coolant before removing the right crankcase cover.
- Be careful not to drain the coolant when the engine temperature is high. (Perform this operation when the engine is cold.)
- Drain the coolant into a clean container.
- Drain the engine oil into a clean container before removing the right crankcase cover.
- When the right crankcase cover is installed, fill with the recommended engine oil and coolant. Then, bleed air from the water jacket.
- Refer to page 18-4 for A.C. generator inspection.

SPECIFICATIONS

Engine oil: SAE15W/40#
API-SG/CD

Oil capacity at change: 0.8 liter

Coolant: distilled water + coolant concentrate

Coolant capacity: 1165cc

SPECIAL TOOLS

Flywheel puller

Flywheel holder

SPECIFICATIONS

Item	Standard (mm)		Service Limit (mm)
Starter driven gear I.D.	20.025_	20.045	20.15mm
Starter driven gear O.D.	42.175_	42.200	41.0mm

TORQUE VALUES

Flywheel nut : 34.3_ 44.1N-m

TROUBLESHOOTING

Refer to page 1-27 for A.C. generator troubleshooting.

Starter motor rotates but engine does not start


- Faulty starter clutch
- Starter motor rotates reversely
- Weak battery

10. A.C. GENERATOR/STARTER CLUTCH

RIGHT CRANKCASE COVER REMOVAL

Disconnect the water hoses from the right crankcase cover.

Remove the nine bolts attaching the right crankcase cover and the cover.

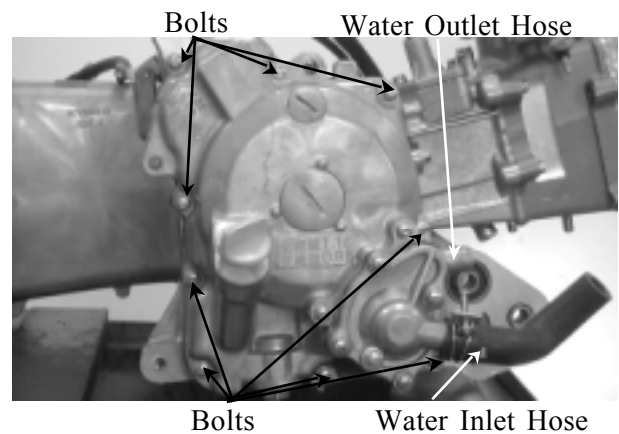


STATOR REMOVAL

Remove the two pulser coil attaching screws and the pulser coil.


Remove the three A.C. generator stator bolts and the stator.

* When removing the pulser coil and stator, be careful not to damage them to avoid shorted or broken wire.

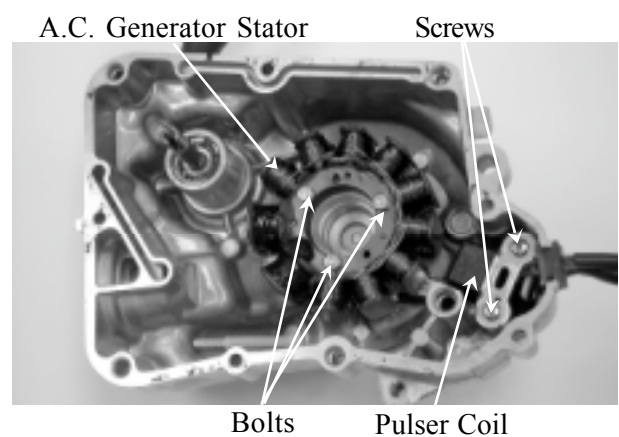


FLYWHEEL REMOVAL

Hold the flywheel with a flywheel holder and remove the flywheel nut.

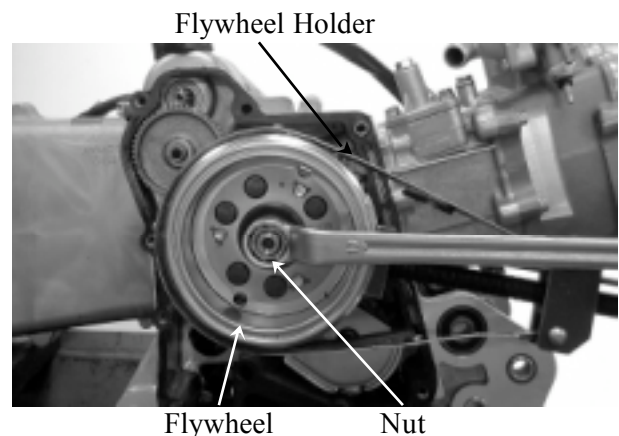

Remove the flywheel with a flywheel puller.

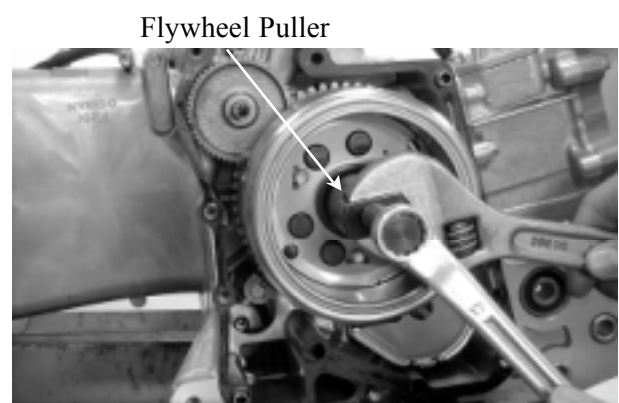


10. A.C. GENERATOR/STARTER CLUTCH

STARTER CLUTCH


REMOVAL

Remove the starter idle gear and shaft.

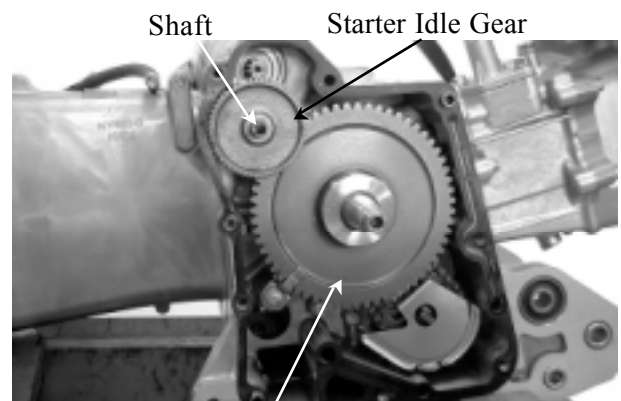

Starter Driven Gear

Remove the starter driven gear.

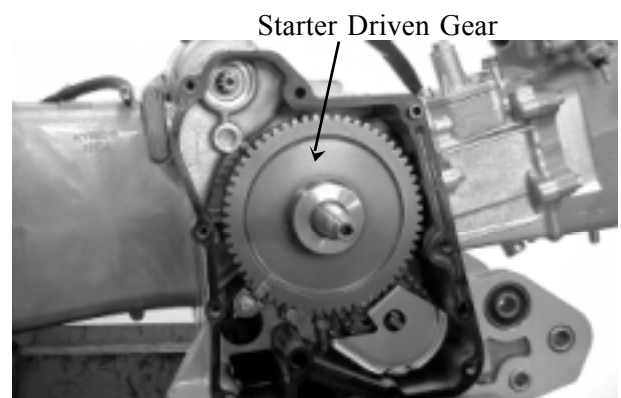

Starter Driven Gear

INSPECTION


Inspect the starter driven gear for wear or damage.

Measure the starter driven gear I.D. and O.D.

Service Limits:


I.D. : 20.15mm replace if over

O.D. : 41.00mm replace if below

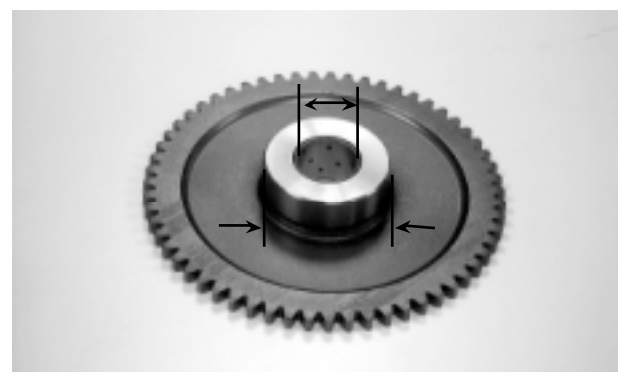

Starter Driven Gear


Inspect the starter idle gear and shaft for wear or damage.

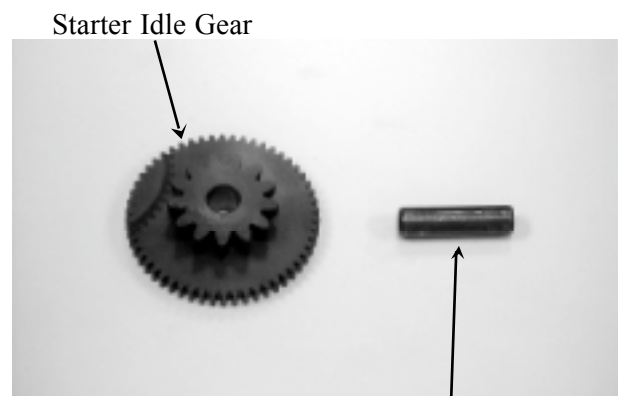

Shaft


10. A.C. GENERATOR/STARTER CLUTCH

Remove the starter one-way clutch rollers, plungers and springs.
Inspect each roller and plunger for wear or damage and check for broken or weak spring.

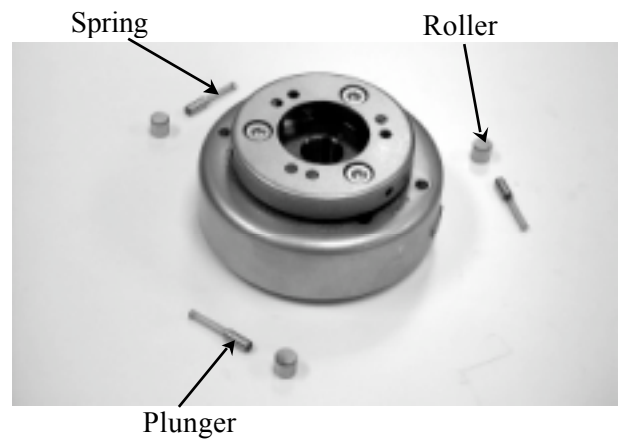

INSTALLATION

Install the starter driven gear onto the crankshaft.
Install the starter idle gear and shaft.

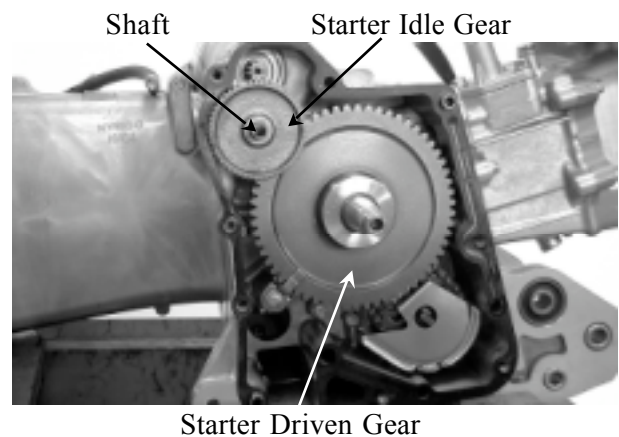



FLYWHEEL INSTALLATION

Install the flywheel onto the crankshaft by aligning the key on the crankshaft with the groove in the flywheel.

- * • Before installation, check and make sure that the inside of the flywheel is not contaminated.

Hold the flywheel with the flywheel holder and tighten the flywheel nut.

Torque: 34.3_ 39.2N-m

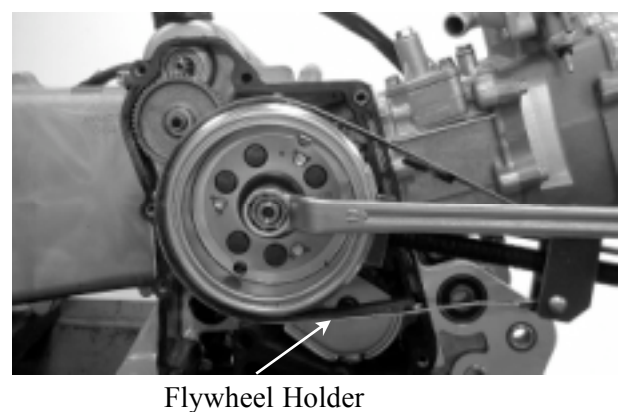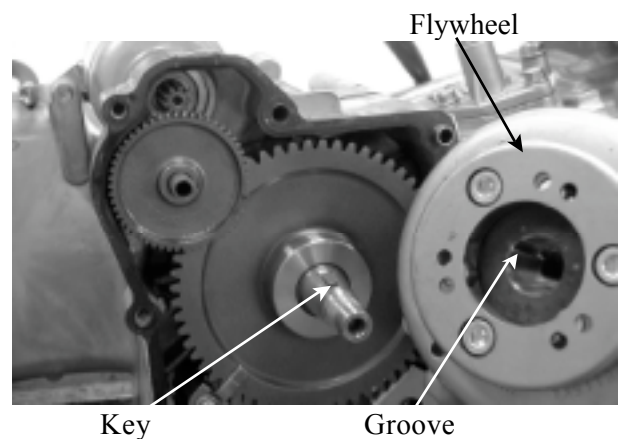

10. A.C. GENERATOR/STARTER CLUTCH


STATOR INSTALLATION

Install the A.C. generator stator on the right crankcase cover and secure it with the three bolts.

Install the pulser coil on the right crankcase cover and secure it with the two screws.


Install the wire grommet in the groove in the right crankcase cover securely.

- * Be sure to route the stator wire under the pulser coil.

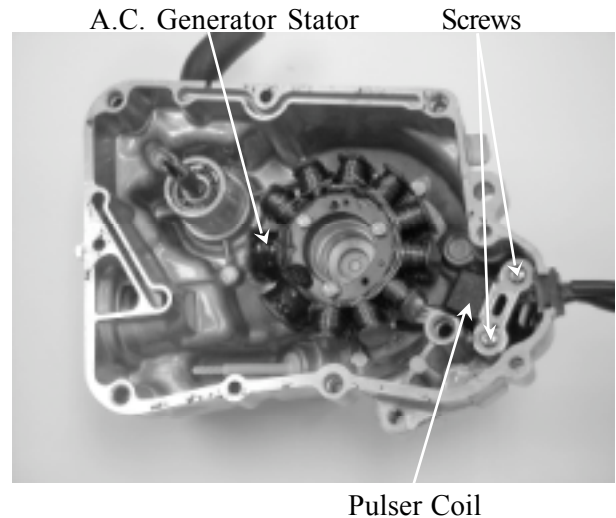

RIGHT CRANKCASE COVER INSTALLATION

Install the two dowel pins and a new gasket.

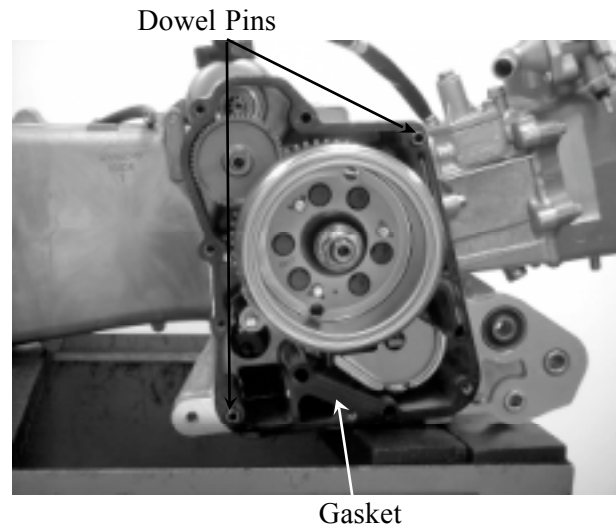

Install the right crankcase cover over the crankcase, aligning the water pump shaft groove with the oil pump shaft.

Tighten the nine right crankcase cover bolts. Connect the water hoses to the right crankcase cover.

Add the recommended engine oil. (⇒4-3)

Fill the cooling system with the specified coolant. (⇒3-9)

- * Be sure to bleed air from the water jacket after filling the coolant.

